

MiBOXER[®] | **Mi·Light**
Subordinate New Brand

High Voltage RGB Dimming LED Driver

Model No.: HF3-P400V210

1. Features

This item is made by 2.4G wireless transfer technology with low consumption and anti-interference. It supports PWM dimming without any flashing and it's built-in power driver which is easy to power on device and protect LED chip. There is overload protection.



16 Millions of colors to choose



Mix red, green and blue light to adjust color temperature



Dim brightness/
Saturation



2.4G RF wireless transmission technology



Signal transmitting & Modes synchronization



Remote control
Control distance 30m



Smartphone App control
(2.4GHz gateway is needed)



Support third party voice control
(2.4GHz gateway is needed)

2. Parameters

Model No.: HF3-P400V210

Input Voltage: 220-240V~ 50/60Hz

Input Current: Max 4.1A@230V~

Output Voltage: 210V $\overline{\text{---}}$

Output Current: Max 1.9A

Rated Power: Max 400W

Efficiency: 94%


Control Distance: 30m

Working Temp.: -10~40°C


Storage Temp.: -40~80°C

Working Humidity: 20~95%RH, non-condensing

Overload Protection: limited power

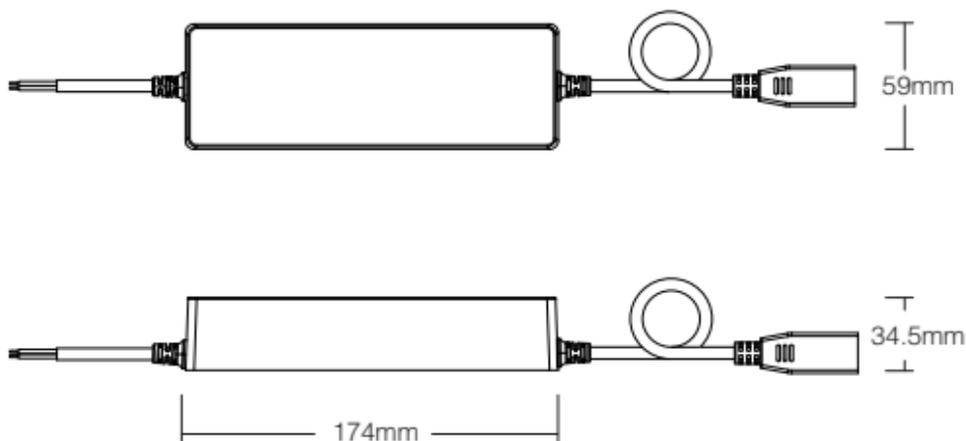

3. Connection Diagram

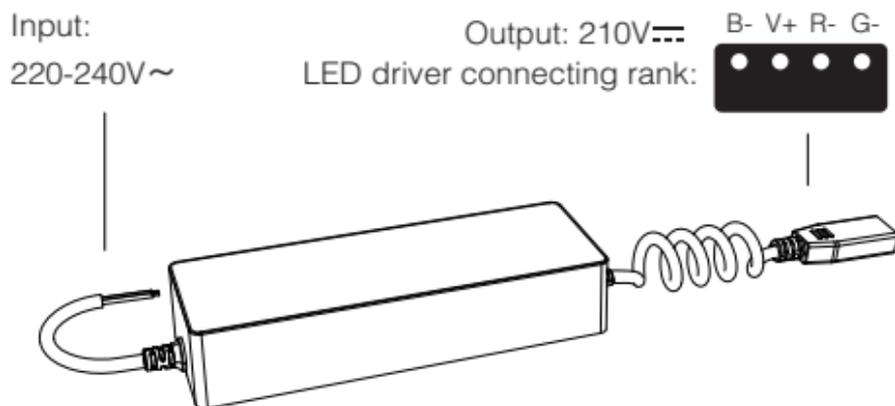

4. Link Code / Unlink Code with remote

Link code

1. Switch off LED driver, switch on again after 10 seconds.
2. Short press zone " | " or " " 3 times on remote within 3 seconds, light blinking 3 times slowly means the linking is done successfully.

Note: The " " key for FUT089 remote don't support to link code.

Unlink code

1. Switch off LED driver, switch on again after 10 seconds.
2. Short press zone " | " or " " 5 times on remote within 3 seconds, light blinking 10 times quickly means the unlinking is done successfully.

Compatible with following remote controls
(Purchase separately)



FUT089



FUT088



FUT092




FUT096




B8



B0



B3 / T3



B4 / T4



WL-Box1



S2-B / S2-W /
S2-G



NOTE:

Light will work after linking with remote control;
for more details, pls read the remote instruction.

If wire position of LED strips doesn't match color output of LED driver, you can modify via remote, method is as follows:

- 01 Link LED driver with remote.
- 02 Power off LED driver for 10 seconds and power on.
- 03 Short press "M" button on remote 5 times within 3 seconds, white light flashes quickly, which means LED driver is entering set mode (automatically exit within 10 seconds if there is no setting).

Note: If lighting has no respond, please press "I" button on its zones, then repeat steps 2-3 again.

- 04 Short press "S-" button on remote until showing red light, short press "S+" button until showing green light, setting is done successfully.
- 05 Press "ON "button to exit or wait for 10 seconds to exit.


5. Auto-transmitting & Synchronization

Signal transmitting

LED driver can transmit the signals from the remote control to another one within 30m, as long as there is LED driver within 30m, the remote control distance is unlimited.

Modes synchronization

Different LED driver can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

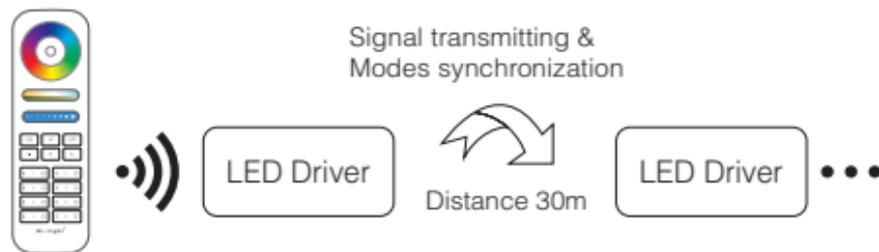

6. Dynamic mode selection

Select dynamic mode table 1:

LED driver is powered off for 10 seconds and then powered on. Press the " S+ " button 5 times within 3 seconds, the blue light blink 3 times slowly, selection is done successfully.

Select dynamic mode table 2:

LED driver is powered off for 10 seconds and then powered on. Press the " S- " button 5 times within 3 seconds, the yellow light blink 3 times slowly, selection is done successfully.

Dynamic mode table 1 (default in factory)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

Dynamic mode table 2 (need to switch manually)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Colors gradual change	Adjustable
2	White light Gradual change	
3	RGB gradual change	
4	Seven colors jump to change	
5	Jump to change randomly	
6	Red light gradual change +Flash 3 times	
7	Green light gradual change +Flash 3 times	
8	Blue light gradual change +Flash 3 times	
9	White light gradual change +Flash 3 times	

7. Switch-OFF to change color instruction

Switch OFF (for 3 seconds); Switch-ON again	Switch-OFF (for over 3 seconds); Switch ON again
<p>Switch the colors and dynamic modes in turn</p> <ol style="list-style-type: none">1. Static Red2. Static Green3. Static Blue4. Static Yellow5. Static Purple6. Static Cyan7. Static Cool White <p>8 to 16 is dynamic mode (Attention: default mode is dynamic mode table 1, users can switch to dynamic mode table 2 manually, please review details in No.6)</p>	<p>Status before switch OFF</p>

8. Attention

1. Please check whether the input voltage supply is in accordance with the strip light driver.
2. Non-professional user cannot dismantle the strip light driver directly, otherwise, it may and electric shock.
3. The working temperature is $-10\sim 40^{\circ}\text{C}$; do not use the device to direct sunlight, moist and other high temperature area.
4. Please do not use strip light driver around the mental area and high magnetic field, otherwise, it will badly affect the control distance.



Made in China